
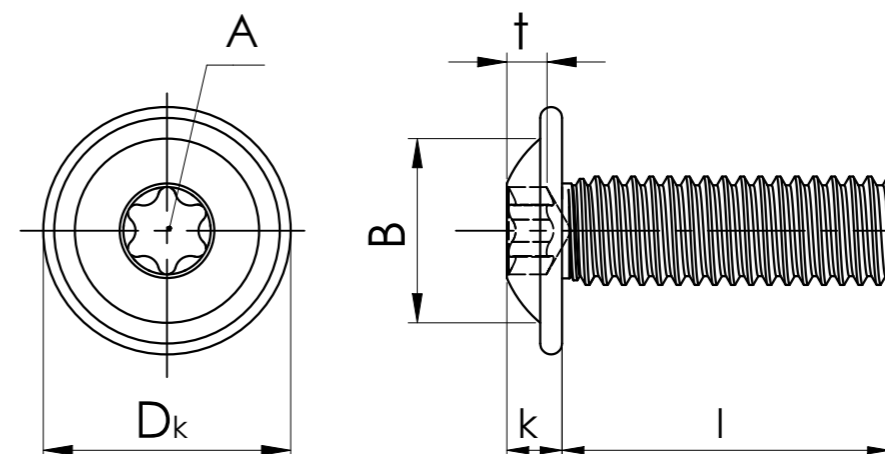


# ISO7380-2 Hex Socket button head screw with collar

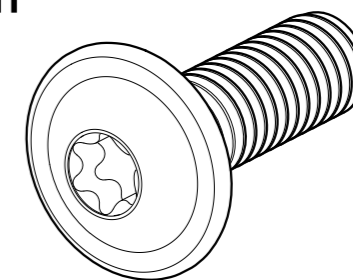

Nom. dia.	Pitch	Collar diameter (D <sub>k</sub> ) (max.)	Head height (k) (max.)	Hex socket size (Nom.)	Crown diameter (B) (ref.)	Penetration gauging depth (t) (min.)
M8	1.25	17.80	4.40	5	13.20	2.67
M6	1.00	13.60	3.30	4	10.00	1.78
M5	0.80	11.80	2.75	3	8.80	1.53
M4	0.70	9.40	2.20	2.5	7.20	1.27
M3	0.50	6.90	1.65	2	5.20	0.89
M2.5	0.45	For more information, please contact our sales staff				
M2	0.40					
M1.6	0.35					
M1.4	0.30					

There is no restriction on the application of recess type. For more information, welcome to contact us.

Unit: mm

